

Connecting Using SAP Mode - iPhone

SAP MODE will allow you to set up your iPhone using a direct connection method. This method will require you to enter your network name and password manually.

1. Navigate to the HydraWise **SETUP** wizard on the HydraWise app or HydraWise.com website.
2. Select your **X2 CONTROLLER**.
3. Click **CONTROLLER SETTINGS** in the left menu tab.
4. Click the **CONNECT TO Wi-Fi** button.
5. Select the **Wi-Fi Direct (SAP Mode)** button on the app or website.
6. Press the **BLACK** button on the WAND 2X for the Wi-Fi setup. WAND's Wi-Fi status LED will blink **AMBER** • twice per second. **SAP** will appear on the controller LCD.
7. Select the **CONTINUE WHEN LED IS BLINKING TWICE** button.
8. Go to the **Wi-Fi** settings on your iPhone or iPad device. Select the **HUNTERX2 XXX** Wi-Fi network name matching the last **3 CHARACTERS** of your WAND serial number.
9. Open the HydraWise app and enter the **NETWORK NAME** and **PASSWORD**. For additional WiFi specifications, [click here](#) [2].
10. Click **CONNECT**.
11. **CONNECTING TO AP** will display on the screen.
12. Click the **DONE** button to continue set irrigation schedules. If not connected, select **START AGAIN** to repeat the process. Once connected, the WAND LED will turn solid green •, the word **ONLINE** with a solid Wi-Fi icon will appear on the controller LCD.


Still Not Connecting?

If the WAND does not connect using this SAP mode, we recommend the **FACTORY RESET** listed below and then the BT Connection method.

1. Press and hold the WAND button for 5 seconds and **Fdr** will appear on the controller LCD.
2. The module **LED** will turn off.
3. Release the button when the solid amber LED appears. The word **DONE** will appear on the controller LCD.

- Return to the online setup wizard in your Hydrowise controller settings account page to reconnect **WAND** to Wi-Fi.

Bluetooth Connection ^[3]

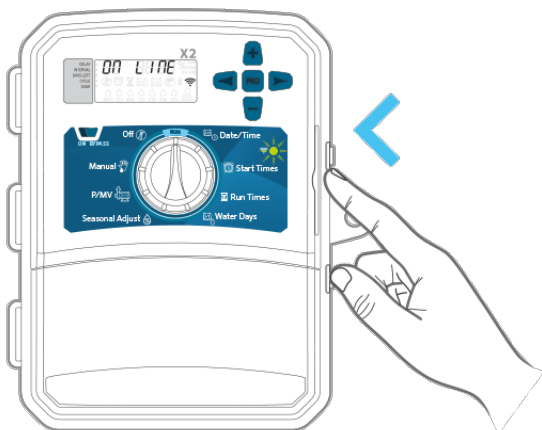

IMPORTANT: The WAND's Wi-Fi pairing process will automatically stop after 10 minutes if no action is taken. Press the WAND button twice to restart the Wi-Fi Direct Setup process or press the WAND button until “SAP” appears on the controller LCD.