



## Connecting WAND with Android Smartphone (Wi-Fi Direct Setup - SAP Mode)


- **1.** Navigate to the Hydrawise **SETUP** wizard on the Hydrawise app or <u>Hydrawise.com</u> website.
- 2. Select your X2 CONTROLLER.
- 3. Click CONTROLLER SETTINGS in the left menu tab.
- 4. Click the **CONNECT TO Wi-Fi** button.
- **5.** At the controller, press the **BLACK** button on the WAND twice for the Wi-Fi setup. WAND's Wi-Fi status LED will blink **AMBER** twice per second. **SAP** will appear on the controller LCD.




- 6. Select the Wi-Fi Direct (SAP Mode) button.
- 7. Click the Continue when the amber LED is blinking twice a button.
- **8.** You should be seeing the **CHOOSE YOUR X2** screen. Select the **HUNTERX2XXX** Wi-Fi network name matching the last **3 CHARACTERS** of your WAND serial number.
- 9. Disable  $\underline{\text{MOBILE DATA}}_{\tiny{[2]}}$  only on your device when prompted.

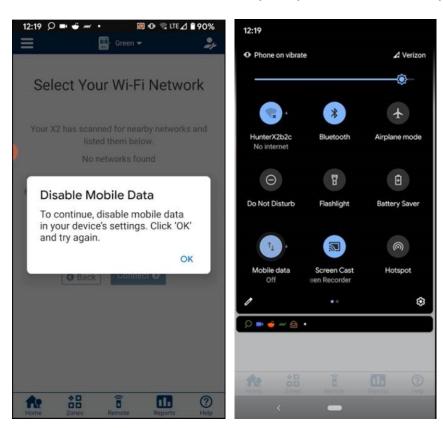

**10.** Return to the Hydrawise app and click the **RESCAN** button.

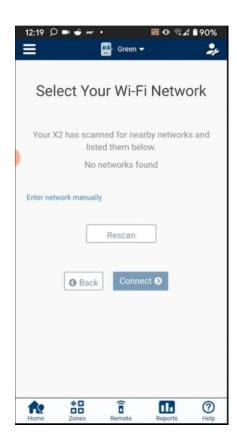

**11.** A list of nearby Wi-Fi networks will appear. Select your wireless network and click the **CONNECT** button.

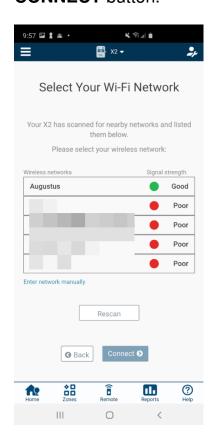


**12.** Enter your Wi-Fi password and click the **CONNECT** button.

If your password is longer than 19 characters, you will need to update your WAND firmware before continuing. See article [3].




**13.** Enable **MOBILE DATA** [2] on your smartphone when prompted. WAND will connect to your Wi-Fi network.

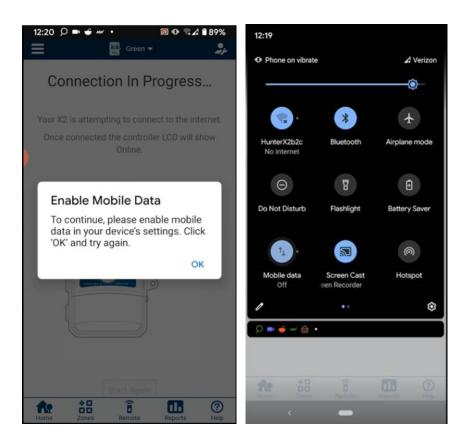

**14.** Once connected, the **WAND LED** will turn solid green •, the word **ONLINE** with a solid Wi-Fi icon will appear on the controller LCD. The Hydrawise app will show a **CONNECTION SUCCESSFUL** message.



**15.** Click the **CONTINUE** button to continue set irrigation schedules.

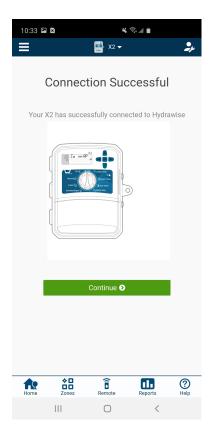

**NOTE:** In some cases, establishing a connection may be an issue, so you may have to restart using this process.

**IMPORTANT:** The WAND's Wi-Fi pairing process will automatically stop after 10 minutes if no action is taken. Press the WAND button twice to restart the Wi-Fi Direct Setup process or press the WAND button until "SAP" appears on the controller LCD.